



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885

sales@royalfastenersindia.com




www.royalfastenersindia.com

ALLEN GRUB SCREW CUP POINT
DIN 916

CATALOGUE NUMBER: **R4C40**

AISS 304 A2

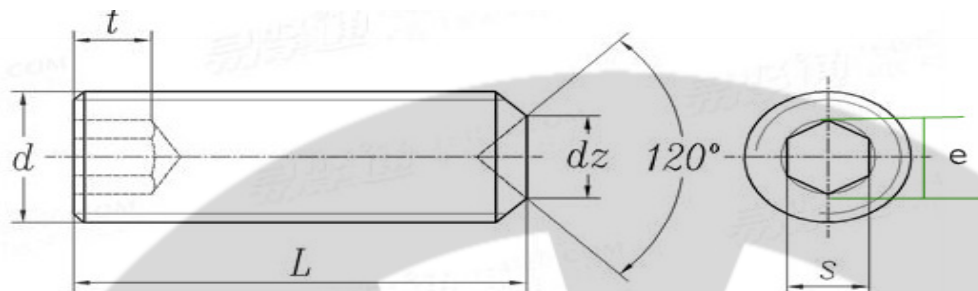

Parameter ↓	Thread Size d →	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8
dz Cup Dia	Max	0.80	1.00	1.20	1.40	2.00	2.50
	Min	0.55	0.75	0.95	1.15	1.75	2.25
t (Socket Depth)	Min	0.70	0.8	1.2	1.2	1.5	2.0
	Max	1.50	1.7	2.0	2.0	2.5	3.0
Key Size		0.70	0.90	1.30	1.50	2.00	2.50
S	Min	0.711	0.889	1.270	1.520	2.020	2.520
	Max	0.724	0.902	1.295	1.545	2.145	2.560
e	Min	0.803	1.003	1.427	1.730	2.300	2.870

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Length ↓	Dia →	M1.6x0.35	M2x0.4	M2.5x0.45	M3x0.5	M4x0.7	M5x0.8
2		R4C4010602	R4C4002002				
3		R4C4010603	R4C4002003	R4C4020503	R4C4003003	R4C4004003	
4		R4C4010604	R4C4002004	R4C4020504	R4C4003004	R4C4004004	R4C4005004
5		R4C4010605	R4C4002005	R4C4020505	R4C4003005	R4C4004005	R4C4005005
6		R4C4010606	R4C4002006	R4C4020506	R4C4003006	R4C4004006	R4C4005006
8		R4C4010608	R4C4002008	R4C4020508	R4C4003008	R4C4004008	R4C4005008
10		R4C4010610	R4C4002010	R4C4020510	R4C4003010	R4C4004010	R4C4005010
12		R4C4010612	R4C4002012	R4C4020512	R4C4003012	R4C4004012	R4C4005012
16			R4C4002016	R4C4020516	R4C4003016	R4C4004016	R4C4005016
20					R4C4003020	R4C4004020	R4C4005020
25					R4C4003025	R4C4004025	R4C4005025
30					R4C4003030	R4C4004030	R4C4005030
35					R4C4003035	R4C4004035	R4C4005035
40					R4C4003040	R4C4004040	R4C4005040
45						R4C4004045	R4C4005045
50						R4C4004050	R4C4005050
55							R4C4005055
60							R4C4005060

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

ALLEN GRUB SCREW CUP POINT
DIN 916

CATALOGUE NUMBER: **R4C40**

AISS 304 A2

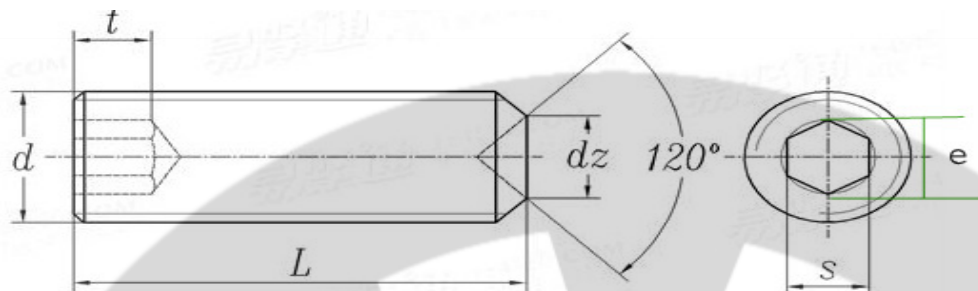

Parameter ↓	Thread Size d →	M6x1.0	M8x1.25	M10x1.5	M12x1.75	M16x2.0	M20x2.5
dz Cup Dia	Max	3.00	5.00	6.00	8.00	10.00	14.00
	Min	2.75	4.70	5.70	7.64	9.64	13.57
t (Socket Depth)	Min	2.0	3.0	4.0	4.80	6.40	8.0
	Max	3.50	5.0	6.0	8.0	10.0	12.0
Key Size		3.00	4.0	5.0	6.0	8.0	10.0
S	Min	3.020	4.020	5.020	6.020	8.025	10.025
	Max	3.080	4.095	5.095	6.095	8.115	10.115
e	Min	3.440	4.58	5.72	6.86	9.15	11.43

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Length ↓	Dia →	M6x1.0	M8x1.25	M10x1.5	M12x1.75	M16x2.0	M20x2.5
5		R4C4006005					
6		R4C4006006	R4C4008006				
8		R4C4006008	R4C4008008	R4C4010008			
10		R4C4006010	R4C4008010	R4C4010010	R4C4012010		
12		R4C4006012	R4C4008012	R4C4010012	R4C4012012		
16		R4C4006016	R4C4008016	R4C4010016	R4C4012016	R4C4016016	
20		R4C4006020	R4C4008020	R4C4010020	R4C4012020	R4C4016020	R4C4020020
25		R4C4006025	R4C4008025	R4C4010025	R4C4012025	R4C4016025	R4C4020025
30		R4C4006030	R4C4008030	R4C4010030	R4C4012030	R4C4016030	R4C4020030
35		R4C4006035	R4C4008035	R4C4010035	R4C4012035	R4C4016035	R4C4020035
40		R4C4006040	R4C4008040	R4C4010040	R4C4012040	R4C4016040	R4C4020040
45		R4C4006045	R4C4008045	R4C4010045	R4C4012045	R4C4016045	R4C4020045
50		R4C4006050	R4C4008050	R4C4010050	R4C4012050	R4C4016050	R4C4020050
55		R4C4006055	R4C4008055	R4C4010055	R4C4012055	R4C4016055	R4C4020055
60		R4C4006060	R4C4008060	R4C4010060	R4C4012060	R4C4016060	R4C4020060
70			R4C4008070	R4C4010070	R4C4012070	R4C4016070	R4C4020070
80			R4C4008080	R4C4010080	R4C4012080	R4C4016080	R4C4020080
90					R4C4012090	R4C4016090	R4C4020090
100						R4C4016100	R4C4020100

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F