



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

STANDARD INTERNAL CIRCLIP

DIN 472 METRIC

CATALOGUE NUMBER: **R4G59I**

STAINLESS STEEL

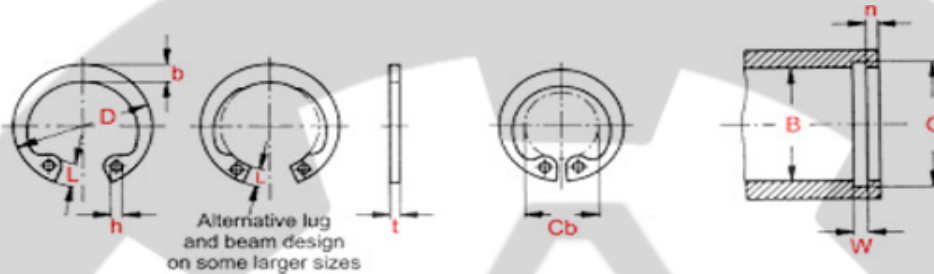

The most common form of axially fitted circlips for bores with grooves. The circlip has a large free diameter and gap width, consequently it fits more tightly into the groove and provides higher and more uniform thrust load capacity. Lugs with holes are provided for rapid fitting for removal with circlip pliers.

Standard material: Carbon Spring Steel.

Standard finish: Phosphate and Oil.

(Note: Standard circlips are also available in Stainless Steel.)

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

| Most Sizes over 170mm are without Lugs | | | | | | | | | | Measurements in mm & kN | | | | | |
|--|--------------------|----------------|-----|----------------|-----|-----|-----|------|-------|-------------------------|----------------|------|-------------|-------------|-------------|
| Shaft | Circlip Dimensions | | | | | | | | | Groove Dimensions | | | | Part No | |
| | t | Tol | D | Tol | Cb | b | L | h | Fr kN | G | Tol | W | n | | Fr kN |
| 8 | 0.80 | +0.00 -0.50 | 8.7 | +0.36 -0.10 | 3.0 | 1.1 | 2.4 | 1.0 | 2.0 | 8.4 | +0.09 -0.00 | 0.90 | 0.6 | 0.86 | R4G59I00008 |
| 9 | 0.80 | | 9.8 | | 3.7 | 1.3 | 2.5 | 1.0 | 2.0 | 9.4 | | 0.90 | 0.6 | 0.96 | R4G59I00009 |
| 10 | 1.00 | 10.8 | 3.3 | | 1.4 | 3.2 | 1.2 | 4.0 | 10.4 | +0.11 -0.00 | 1.10 | 0.6 | 1.08 | R4G59I00010 | |
| 11 | 1.00 | 11.8 | 4.1 | | 1.5 | 3.3 | 1.2 | 4.0 | 11.4 | | 1.10 | 0.6 | 1.17 | R4G59I00011 | |
| 12 | 1.00 | 13.0 | 4.9 | | 1.7 | 3.4 | 1.5 | 4.0 | 12.5 | | 1.10 | 0.8 | 1.6 | R4G59I00012 | |
| 13 | 1.00 | 14.1 | 5.4 | | 1.8 | 3.6 | 1.5 | 4.2 | 13.6 | | 1.10 | 0.9 | 2.1 | R4G59I00013 | |
| 14 | 1.00 | 15.1 | 6.2 | | 1.9 | 3.7 | 1.7 | 4.5 | 14.6 | | 1.10 | 0.9 | 2.25 | R4G59I00014 | |
| 15 | 1.00 | 16.2 | 7.2 | | 2.0 | 3.7 | 1.7 | 5.0 | 15.7 | | 1.10 | 1.1 | 2.8 | R4G59I00015 | |
| 16 | 1.00 | 17.3 | 8.0 | | 2.0 | 3.8 | 1.7 | 5.5 | 16.8 | | 1.10 | 1.2 | 3.4 | R4G59I00016 | |
| 17 | 1.00 | 18.3 | 8.8 | | 2.1 | 3.9 | 1.7 | 6.0 | 17.8 | | 1.10 | 1.2 | 3.6 | R4G59I00017 | |
| 18 | 1.00 | 19.5 | 9.4 | 2.2 | 4.1 | 2.0 | 6.5 | 19.0 | +0.13 | 1.10 | 1.5 | 4.8 | R4G59I00018 | | |



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com



www.royalfastenersindia.com

STANDARD INTERNAL CIRCLIP

DIN 472 METRIC

CATALOGUE NUMBER: **R4G59I**

STAINLESS STEEL

| | | | | | | | | | | | | | | | |
|----|------|--|------|-------|------|-----|-----|-----|-------|------|-------|------|-----|------|-------------|
| 19 | 1.00 | | 20.5 | | 10.4 | 2.2 | 4.1 | 2.0 | 6.8 | 20.0 | -0.00 | 1.10 | 1.5 | 5.1 | R4G59I00019 |
| 20 | 1.00 | | 21.5 | | 11.2 | 2.3 | 4.2 | 2.0 | 7.2 | 21.0 | | 1.10 | 1.5 | 5.4 | R4G59I00020 |
| 21 | 1.00 | | 22.5 | | 12.2 | 2.4 | 4.2 | 2.0 | 7.6 | 22.0 | | 1.10 | 1.5 | 5.7 | R4G59I00021 |
| 22 | 1.00 | | 23.5 | | 13.2 | 2.5 | 4.2 | 2.0 | 8.0 | 23.0 | | 1.10 | 1.5 | 5.9 | R4G59I00022 |
| 23 | 1.20 | | 24.6 | | 14.2 | 2.5 | 4.2 | 2.0 | 13.8 | 24.1 | | 1.30 | 1.5 | 6.8 | R4G59I00023 |
| 24 | 1.20 | | 25.9 | +0.42 | 14.8 | 2.6 | 4.4 | 2.0 | 13.9 | 25.2 | | 1.30 | 1.8 | 7.7 | R4G59I00024 |
| 25 | 1.20 | | 26.9 | -0.21 | 15.5 | 2.7 | 4.5 | 2.0 | 14.6 | 26.2 | | 1.30 | 1.8 | 8.0 | R4G59I00025 |
| 26 | 1.20 | | 27.9 | | 16.1 | 2.8 | 4.7 | 2.0 | 13.85 | 27.2 | +0.21 | 1.30 | 1.8 | 8.4 | R4G59I00026 |
| 27 | 1.20 | | 29.1 | | 17.1 | 2.9 | 4.7 | 2.0 | 13.3 | 28.4 | -0.00 | 1.30 | 2.1 | 10.1 | R4G59I00027 |
| 28 | 1.20 | | 30.1 | | 17.9 | 2.9 | 4.8 | 2.0 | 13.3 | 29.4 | | 1.30 | 2.1 | 10.5 | R4G59I00028 |
| 29 | 1.20 | | 31.1 | | 18.4 | 3.0 | 4.8 | 2.0 | 13.6 | 30.4 | | 1.30 | 2.1 | 10.9 | R4G59I00029 |
| 30 | 1.20 | | 32.1 | | 19.9 | 3.0 | 4.8 | 2.0 | 13.7 | 31.4 | | 1.30 | 2.1 | 11.3 | R4G59I00030 |
| 31 | 1.20 | | 33.4 | | 20.0 | 3.2 | 5.2 | 2.5 | 13.8 | 32.7 | | 1.30 | 2.6 | 14.1 | R4G59I00031 |
| 32 | 1.20 | | 34.4 | +0.5 | 20.6 | 3.2 | 5.4 | 2.5 | 14.3 | 33.7 | | 1.30 | 2.6 | 14.6 | R4G59I00032 |
| 33 | 1.20 | | 35.5 | 0 | 21.6 | 3.3 | 5.4 | 2.5 | 26.2 | 34.7 | | 1.30 | 2.6 | 15.0 | R4G59I00033 |
| 34 | 1.50 | | 36.5 | -0.25 | 22.6 | 3.3 | 5.4 | 2.5 | 26.9 | 35.7 | | 1.60 | 2.6 | 15.4 | R4G59I00034 |
| 35 | 1.50 | | 37.8 | | 23.6 | 3.4 | 5.4 | 2.5 | 26.4 | 37.0 | | 1.60 | 3.0 | 18.8 | R4G59I00035 |
| 36 | 1.50 | | 38.8 | | 24.6 | 3.5 | 5.4 | 2.5 | 27.1 | 38.0 | | 1.60 | 3.0 | 19.4 | R4G59I00036 |
| 37 | 1.50 | | 39.8 | | 25.4 | 3.6 | 5.5 | 2.5 | 28.2 | 39.0 | | 1.60 | 3.0 | 19.8 | R4G59I00037 |
| 38 | 1.50 | | 40.8 | | 26.4 | 3.7 | 5.5 | 2.5 | 28.8 | 40.0 | +0.25 | 1.60 | 3.0 | 22.5 | R4G59I00038 |
| 39 | 1.50 | | 42.0 | | 27.2 | 3.8 | 5.6 | 2.5 | 28.8 | 41.0 | -0.00 | 1.60 | 3.0 | 26.0 | R4G59I00039 |
| 40 | 1.75 | | 43.5 | | 27.8 | 3.9 | 5.8 | 2.5 | 44.6 | 42.5 | | 1.85 | 3.8 | 27.0 | R4G59I00040 |
| 41 | 1.75 | | 44.5 | | 28.6 | 4.0 | 5.9 | 2.5 | 45.0 | 43.5 | | 1.85 | 3.8 | 27.6 | R4G59I00041 |
| 42 | 1.75 | | 45.5 | +0.9 | 29.6 | 4.1 | 5.9 | 2.5 | 44.7 | 44.5 | | 1.85 | 3.8 | 28.4 | R4G59I00042 |
| 43 | 1.75 | | 46.5 | 0 | 30.6 | 4.2 | 5.9 | 2.5 | 44.5 | 45.5 | | 1.85 | 3.8 | 28.8 | R4G59I00043 |
| 44 | 1.75 | | 47.5 | -0.39 | 31.4 | 4.2 | 6.0 | 2.5 | 43.3 | 46.5 | | 1.85 | 3.8 | 29.5 | R4G59I00044 |
| 45 | 1.75 | | 48.5 | | 32.0 | 4.3 | 6.2 | 2.5 | 43.1 | 47.5 | | 1.85 | 3.8 | 30.2 | R4G59I00045 |
| 46 | 1.75 | | 49.5 | | 32.7 | 4.4 | 6.3 | 2.5 | 42.9 | 48.5 | | 1.85 | 3.8 | 30.8 | R4G59I00046 |



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com



www.royalfastenersindia.com

STANDARD INTERNAL CIRCLIP

DIN 472 METRIC

CATALOGUE NUMBER: **R4G59I**

STAINLESS STEEL

| | | | | | | | | | | | | | | | |
|----|------|----------------|------|-----------|------|-----|-----|-----|-------|------|----------------|------|-----|------|-------------|
| 47 | 1.75 | | 50.5 | | 33.5 | 4.4 | 6.4 | 2.5 | 43.5 | 49.5 | | 1.85 | 3.8 | 31.4 | R4G59I00047 |
| 48 | 1.75 | | 51.5 | | 34.5 | 4.5 | 6.4 | 2.5 | 43.2 | 50.5 | | 1.85 | 3.8 | 32.0 | R4G59I00048 |
| 50 | 2.00 | | 54.2 | | 36.3 | 4.6 | 6.5 | 2.5 | 60.8 | 53.0 | | 2.15 | 4.5 | 40.5 | R4G59I00050 |
| 51 | 2.00 | | 55.2 | | 37.3 | 4.7 | 6.5 | 2.5 | 60.2 | 54.0 | | 2.15 | 4.5 | 41.2 | R4G59I00051 |
| 52 | 2.00 | | 56.2 | | 37.9 | 4.7 | 6.7 | 2.5 | 60.25 | 55.0 | | 2.15 | 4.5 | 42.0 | R4G59I00052 |
| 53 | 2.00 | | 57.2 | | 38.9 | 4.9 | 6.7 | 2.5 | 60.7 | 56.0 | | 2.15 | 4.5 | 42.9 | R4G59I00053 |
| 54 | 2.00 | | 58.2 | | 39.9 | 5.0 | 6.7 | 2.5 | 60.4 | 57.0 | | 2.15 | 4.5 | 43.6 | R4G59I00054 |
| 55 | 2.00 | | 59.2 | | 40.7 | 5.0 | 6.7 | 2.5 | 60.3 | 58.0 | | 2.15 | 4.5 | 44.4 | R4G59I00055 |
| 56 | 2.00 | +0.00 -0.07 | 60.2 | | 41.7 | 5.1 | 6.8 | 2.5 | 60.3 | 59.0 | | 2.15 | 4.5 | 45.2 | R4G59I00056 |
| 57 | 2.00 | | 61.2 | | 42.7 | 5.1 | 6.8 | 2.5 | 60.8 | 60.0 | | 2.15 | 4.5 | 46.0 | R4G59I00057 |
| 58 | 2.00 | | 62.2 | +1.1 0 | 43.5 | 5.2 | 6.9 | 2.5 | 60.8 | 61.0 | | 2.15 | 4.5 | 46.7 | R4G59I00058 |
| 60 | 2.00 | | 64.2 | -0.46 | 44.7 | 5.4 | 7.3 | 2.5 | 61.0 | 63.0 | +0.30 -0.00 | 2.15 | 4.5 | 48.3 | R4G59I00060 |
| 62 | 2.00 | | 66.2 | | 46.7 | 5.5 | 7.3 | 2.5 | 60.9 | 65.0 | | 2.15 | 4.5 | 49.8 | R4G59I00062 |
| 63 | 2.00 | | 67.2 | | 47.7 | 5.6 | 7.3 | 2.5 | 60.8 | 66.0 | | 2.15 | 4.5 | 50.6 | R4G59I00063 |
| 64 | 2.00 | | 68.2 | | 48.2 | 5.7 | 7.5 | 2.5 | 60.6 | 67.0 | | 2.15 | 4.5 | 51.4 | |
| 65 | 2.50 | | 69.2 | | 49.0 | 5.8 | 7.6 | 3.0 | 121.0 | 68.0 | | 2.65 | 4.5 | 51.8 | R4G59I00065 |
| 67 | 2.50 | | 71.5 | | 50.8 | 6.0 | 7.7 | 3.0 | 121.0 | 70.0 | | 2.65 | 4.5 | 53.8 | R4G59I00067 |
| 68 | 2.50 | | 72.5 | | 51.6 | 6.1 | 7.8 | 3.0 | 121.5 | 71.0 | | 2.65 | 4.5 | 54.5 | R4G59I00068 |
| 70 | 2.50 | | 74.5 | | 53.6 | 6.2 | 7.8 | 3.0 | 119.0 | 73.0 | | 2.65 | 4.5 | 56.2 | R4G59I00070 |
| 72 | 2.50 | +0.00 -0.07 | 76.5 | | 55.6 | 6.4 | 7.8 | 3.0 | 119.2 | 75.0 | | 2.65 | 4.5 | 58.0 | R4G59I00072 |
| 75 | 2.50 | | 79.5 | | 58.6 | 6.6 | 7.8 | 3.0 | 118.0 | 78.0 | | 2.65 | 4.5 | 60.0 | R4G59I00075 |
| 77 | 2.50 | | 81.5 | | 60.4 | 6.7 | 7.9 | 3.0 | 121.1 | 80.0 | | 2.65 | 4.5 | 61.6 | R4G59I00077 |
| 78 | 2.50 | | 82.5 | | 60.1 | 6.8 | 8.5 | 3.0 | 122.5 | 81.0 | | 2.65 | 4.5 | 62.3 | R4G59I00078 |
| 80 | 2.50 | | 85.5 | | 62.1 | 7.0 | 8.5 | 3.0 | 120.9 | 83.5 | | 2.65 | 5.3 | 74.6 | R4G59I00080 |
| 82 | 2.50 | | 87.5 | +1.3 0 | 64.1 | 7.0 | 8.5 | 3.0 | 119.0 | 85.5 | +0.35 -0.00 | 2.65 | 5.3 | 76.6 | R4G59I00082 |
| 85 | 3.00 | | 90.5 | -0.54 | 66.9 | 7.2 | 8.6 | 3.5 | 201.4 | 88.5 | | 3.15 | 5.3 | 79.5 | R4G59I00085 |
| 87 | 3.00 | +0.00 -0.08 | 92.5 | | 68.9 | 7.3 | 8.6 | 3.5 | 204.5 | 90.5 | | 3.15 | 5.3 | 81.3 | R4G59I00087 |
| 88 | 3.00 | | 93.5 | | 69.9 | 7.4 | 8.6 | 3.5 | 209.4 | 91.5 | | 3.15 | 5.3 | 82.1 | R4G59I00088 |



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com



www.royalfastenersindia.com

STANDARD INTERNAL CIRCLIP

DIN 472 METRIC

CATALOGUE NUMBER: **R4G59I**

STAINLESS STEEL

| | | | | | | | | | | | | | | | |
|-----|------|-------|-------|-------|-------|------|------|-----|-------|-------|-------|------|-----|-------|-------------|
| 90 | 3.00 | | 95.5 | | 71.9 | 7.6 | 8.6 | 3.5 | 199.0 | 93.5 | | 3.15 | 5.3 | 84.0 | R4G59I00090 |
| 92 | 3.00 | | 97.5 | | 73.7 | 7.8 | 8.7 | 3.5 | 201.0 | 95.5 | | 3.15 | 5.3 | 85.8 | R4G59I00092 |
| 95 | 3.00 | | 100.5 | | 76.5 | 8.1 | 8.8 | 3.5 | 195.0 | 98.5 | | 3.15 | 5.3 | 88.6 | R4G59I00095 |
| 97 | 3.00 | | 102.5 | | 78.5 | 8.2 | 8.8 | 3.5 | 193.0 | 100.5 | | 3.15 | 5.3 | 90.5 | R4G59I00097 |
| 98 | 3.00 | | 103.5 | | 79.0 | 8.3 | 9.0 | 3.5 | 191.0 | 101.5 | | 3.15 | 5.3 | 91.3 | R4G59I00098 |
| 100 | 3.00 | | 105.5 | | 80.6 | 8.4 | 9.2 | 3.5 | 188.0 | 103.5 | | 3.15 | 5.3 | 93.1 | R4G59I00100 |
| 102 | 4.00 | | 108.0 | | 82.0 | 8.5 | 9.5 | 3.5 | 439.0 | 106.0 | | 4.15 | 6.0 | 108.8 | R4G59I00102 |
| 105 | 4.00 | | 112.0 | | 85.0 | 8.7 | 9.5 | 3.5 | 436.0 | 109.0 | | 4.15 | 6.0 | 112.0 | R4G59I00105 |
| 108 | 4.00 | | 115.0 | | 88.0 | 8.9 | 9.5 | 3.5 | 419.0 | 112.0 | +0.54 | 4.15 | 6.0 | 115.0 | R4G59I00108 |
| 110 | 4.00 | | 117.0 | | 88.2 | 9.0 | 10.4 | 3.5 | 415.0 | 114.0 | -0.00 | 4.15 | 6.0 | 117.0 | R4G59I00110 |
| 112 | 4.00 | | 119.0 | | 90.0 | 9.1 | 10.5 | 3.5 | 418.0 | 116.0 | | 4.15 | 6.0 | 119.0 | R4G59I00112 |
| 115 | 4.00 | | 122.0 | | 93.0 | 9.3 | 10.5 | 3.5 | 409.0 | 119.0 | | 4.15 | 6.0 | 122.0 | R4G59I00115 |
| 120 | 4.00 | | 127.0 | | 96.9 | 9.7 | 11.0 | 3.5 | 396.0 | 124.0 | | 4.15 | 6.0 | 127.0 | R4G59I00120 |
| 125 | 4.00 | | 132.0 | | 101.9 | 10.0 | 11.0 | 4.0 | 385.0 | 129.0 | | 4.15 | 6.0 | 132.0 | R4G59I00125 |
| 130 | 4.00 | | 137.0 | | 106.9 | 10.2 | 11.0 | 4.0 | 374.0 | 134.0 | | 4.15 | 6.0 | 138.0 | R4G59I00130 |
| 135 | 4.00 | | 142.0 | | 111.5 | 10.5 | 11.2 | 4.0 | 358.0 | 139.0 | | 4.15 | 6.0 | 143.0 | R4G59I00135 |
| 140 | 4.00 | +0.00 | 147.0 | +1.5 | 116.5 | 10.7 | 11.2 | 4.0 | 350.0 | 144.0 | | 4.15 | 6.0 | 148.0 | R4G59I00140 |
| 145 | 4.00 | -0.10 | 152.0 | 0 | 121.0 | 10.9 | 11.4 | 4.0 | 336.0 | 149.0 | +0.63 | 4.15 | 6.0 | 153.0 | R4G59I00145 |
| 150 | 4.00 | | 158.0 | -0.63 | 124.8 | 11.2 | 12.0 | 4.0 | 326.0 | 155.0 | -0.00 | 4.15 | 7.5 | 191.0 | R4G59I00150 |
| 155 | 4.00 | | 164.0 | | 129.8 | 11.4 | 12.0 | 4.0 | 324.0 | 160.0 | | 4.15 | 7.5 | 206.0 | R4G59I00155 |
| 160 | 4.00 | | 169.0 | | 132.7 | 11.6 | 13.0 | 4.0 | 321.0 | 165.0 | | 4.15 | 7.5 | 212.0 | R4G59I00160 |
| 165 | 4.00 | | 174.5 | | 137.7 | 11.8 | 13.0 | 4.0 | 319.0 | 170.0 | | 4.15 | 7.5 | 219.0 | R4G59I00165 |
| 170 | 4.00 | | 179.5 | | 141.6 | 12.2 | 13.5 | 4.0 | 349.0 | 175.0 | | 4.15 | 7.5 | 225.0 | R4G59I00170 |
| 175 | 4.00 | | 184.5 | | 146.6 | 12.7 | 13.5 | 4.0 | 351.0 | 180.0 | | 4.15 | 7.5 | 232.0 | R4G59I00175 |
| 180 | 4.00 | | 189.5 | | 150.2 | 13.2 | 14.2 | 4.0 | 347.0 | 185.0 | | 4.15 | 7.5 | 238.0 | R4G59I00180 |
| 185 | 4.00 | | 194.5 | +1.7 | 155.2 | 13.7 | 14.2 | 4.0 | 349.0 | 190.0 | +0.72 | 4.15 | 7.5 | 245.0 | R4G59I00185 |
| 190 | 4.00 | | 199.5 | 0 | 160.2 | 13.8 | 14.2 | 4.0 | 340.0 | 195.0 | -0.00 | 4.15 | 7.5 | 251.0 | R4G59I00190 |
| 195 | 4.00 | | 204.5 | -0.72 | 165.2 | 13.8 | 14.2 | 4.0 | 330.0 | 200.0 | | 4.15 | 7.5 | 258.0 | R4G59I00195 |



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com



www.royalfastenersindia.com

STANDARD INTERNAL CIRCLIP

DIN 472 METRIC

CATALOGUE NUMBER: **R4G59I**

STAINLESS STEEL

| | | | | | | | | | | | | | | | |
|-----|------|--|-------|--|-------|------|------|-----|-------|-------|--|------|------|-------|-------------|
| 200 | 4.00 | | 209.5 | | 170.2 | 14.0 | 14.2 | 4.0 | 325.0 | 205.0 | | 4.15 | 7.5 | 265.0 | R4G59I00200 |
| 205 | 5.00 | | 217.0 | | 175.2 | 14.0 | 14.2 | 4.0 | 616.0 | 211.0 | | 5.15 | 9.0 | 326.0 | R4G59I00205 |
| 210 | 5.00 | | 222.0 | | 180.2 | 14.0 | 14.2 | 4.0 | 601.0 | 216.0 | | 5.15 | 9.0 | 333.0 | R4G59I00210 |
| 215 | 5.00 | | 227.0 | | 185.2 | 14.0 | 14.2 | 4.0 | 586.0 | 221.0 | | 5.15 | 9.0 | 341.0 | R4G59I00215 |
| 220 | 5.00 | | 232.0 | | 190.2 | 14.0 | 14.2 | 4.0 | 574.0 | 226.0 | | 5.15 | 9.0 | 349.0 | R4G59I00220 |
| 225 | 5.00 | | 237.0 | | 195.2 | 14.0 | 14.2 | 4.0 | 560.0 | 231.0 | | 5.15 | 9.0 | 357.0 | R4G59I00225 |
| 230 | 5.00 | | 242.0 | | 200.2 | 14.0 | 14.2 | 4.0 | 549.0 | 236.0 | | 5.15 | 9.0 | 365.0 | R4G59I00230 |
| 235 | 5.00 | | 247.0 | | 205.2 | 14.0 | 14.2 | 4.0 | 536.0 | 241.0 | | 5.15 | 9.0 | 373.0 | R4G59I00235 |
| 240 | 5.00 | | 252.0 | | 210.2 | 14.0 | 14.2 | 4.0 | 525.0 | 246.0 | | 5.15 | 9.0 | 380.0 | R4G59I00240 |
| 245 | 5.00 | | 257.0 | | 215.2 | 14.0 | 14.2 | 4.0 | 514.0 | 251.0 | | 5.15 | 9.0 | 389.0 | R4G59I00245 |
| 250 | 5.00 | | 262.0 | | 220.2 | 14.0 | 14.2 | 4.0 | 504.0 | 256.0 | | 5.15 | 9.0 | 396.0 | R4G59I00250 |
| 255 | 5.00 | | 270.0 | | 221.0 | 16.0 | 16.2 | 5.0 | 549.0 | 263.0 | | 5.15 | 12.0 | 541.0 | R4G59I00255 |
| 260 | 5.00 | | 275.0 | | 226.0 | 16.0 | 16.2 | 5.0 | 539.0 | 268.0 | | 5.15 | 12.0 | 553.0 | R4G59I00260 |
| 265 | 5.00 | | 280.0 | | 231.0 | 16.0 | 16.2 | 5.0 | 528.0 | 273.0 | | 5.15 | 12.0 | 563.0 | R4G59I00265 |
| 270 | 5.00 | | 285.0 | | 236.0 | 16.0 | 16.2 | 5.0 | 518.0 | 278.0 | | 5.15 | 12.0 | 573.0 | R4G59I00270 |
| 275 | 5.00 | | 290.0 | | 241.0 | 16.0 | 16.2 | 5.0 | 509.0 | 283.0 | | 5.15 | 12.0 | 585.0 | R4G59I00275 |
| 280 | 5.00 | | 295.0 | | 246.0 | 16.0 | 16.2 | 5.0 | 499.0 | 288.0 | | 5.15 | 12.0 | 593.0 | R4G59I00280 |
| 285 | 5.00 | | 300.0 | | 251.0 | 16.0 | 16.2 | 5.0 | 491.0 | 293.0 | | 5.15 | 12.0 | 605.0 | R4G59I00285 |
| 290 | 5.00 | | 305.0 | | 256.0 | 16.0 | 16.2 | 5.0 | 482.0 | 298.0 | | 5.15 | 12.0 | 615.0 | R4G59I00290 |
| 295 | 5.00 | | 310.0 | | 261.0 | 16.0 | 16.2 | 5.0 | 474.0 | 303.0 | | 5.15 | 12.0 | 625.0 | R4G59I00295 |
| 300 | 5.00 | | 315.0 | | 266.0 | 16.0 | 16.2 | 5.0 | 466.0 | 308.0 | | 5.15 | 12.0 | 636.0 | R4G59I00300 |
| 310 | 6.00 | | 327.0 | | 268.0 | 20.0 | 20.2 | 6.0 | 947.0 | 320.0 | | 6.20 | 15.0 | 823.0 | R4G59I00310 |
| 320 | 6.00 | | 337.0 | | 278.0 | 20.0 | 20.2 | 6.0 | 919.0 | 330.0 | | 6.20 | 15.0 | 850.0 | R4G59I00320 |
| 330 | 6.00 | | 347.0 | | 288.0 | 20.0 | 20.2 | 6.0 | 894.0 | 340.0 | | 6.20 | 15.0 | 876.0 | R4G59I00330 |
| 340 | 6.00 | | 357.0 | | 298.0 | 20.0 | 20.2 | 6.0 | 869.0 | 350.0 | | 6.20 | 15.0 | 903.0 | R4G59I00340 |
| 350 | 6.00 | | 367.0 | | 308.0 | 20.0 | 20.2 | 6.0 | 846.0 | 360.0 | | 6.20 | 15.0 | 929.0 | R4G59I00350 |
| 360 | 6.00 | | 377.0 | | 318.0 | 20.0 | 20.2 | 6.0 | 823.0 | 370.0 | | 6.20 | 15.0 | 955.0 | R4G59I00360 |
| 370 | 6.00 | | 387.0 | | 328.0 | 20.0 | 20.2 | 6.0 | 803.0 | 380.0 | | 6.20 | 15.0 | 981.0 | R4G59I00370 |



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com



www.royalfastenersindia.com

STANDARD INTERNAL CIRCLIP

DIN 472 METRIC

CATALOGUE NUMBER: **R4G59I**

STAINLESS STEEL

| | | | | | | | | | | | | | | | |
|-----|------|--|-------|--|-------|------|------|-----|-------|-------|----------------|------|------|-------|-------------|
| 380 | 6.00 | | 397.0 | | 338.0 | 20.0 | 20.2 | 6.0 | 784.0 | 390.0 | | 6.20 | 15.0 | 1008. | R4G59I00380 |
| | | | | | | | | | | | | | | 0 | |
| 390 | 6.00 | | 407.0 | | 348.0 | 20.0 | 20.2 | 6.0 | 764.0 | 400.0 | | 6.20 | 15.0 | 1033. | R4G59I00390 |
| | | | | | | | | | | | | | | 0 | |
| 400 | 6.00 | | 417.0 | | 358.0 | 20.0 | 20.2 | 6.0 | 746.0 | 410.0 | +1.00 -0.00 | 6.20 | 15.0 | 1060. | R4G59I00400 |
| | | | | | | | | | | | | | | 0 | |

RIS