



# Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

## HEX CAP NUT DIN 917

CATALOGUE NUMBER: **R4D15C**

**AISS 304 A2**

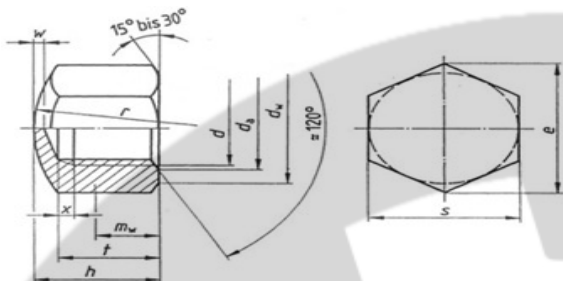

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

| Parameter ↓                    | Size → | M3x0.5      | M4x0.7      | M5x0.7      | M6x1.0      | M8x1.25     | M10x1.5     | M12x1.75    | M14x2.0     |
|--------------------------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>Item Code</b> →             |        | R4D15C03000 | R4D15C04000 | R4D15C05000 | R4D15C06000 | R4D15C08000 | R4D15C10000 | R4D15C12000 | R4D15C14000 |
| Width A/F <b>s</b>             |        | 5.50        | 7.00        | 8.00        | 10.00       | 13.00       | 17.00       | 19.00       | 22.00       |
| Width A/C <b>e min</b>         |        | 6.01        | 7.66        | 8.79        | 11.05       | 14.38       | 18.90       | 21.10       | 24.49       |
| Hole Depth <b>t</b>            | Max    | 3.46        | 4.64        | 5.44        | 7.29        | 9.79        | 11.35       | 13.85       | 15.35       |
|                                | Min    | 3.00        | 4.16        | 4.96        | 6.71        | 9.21        | 10.65       | 13.15       | 14.65       |
| Nut Height <b>h</b>            | Max    | 5.00        | 5.50        | 7.00        | 9.00        | 12.00       | 14.00       | 16.00       | 18.00       |
|                                | Min    | 4.70        | 5.20        | 6.64        | 8.64        | 11.57       | 13.57       | 15.57       | 17.57       |
| Wrenching Height <b>mw min</b> |        | 2.10        | 2.80        | 3.50        | 4.50        | 6.00        | 7.00        | 8.00        | 9.00        |
| Dome Thickness <b>w</b>        |        | 1.00        | 1.00        | 1.00        | 1.50        | 2.00        | 2.00        | 2.00        | 2.00        |
| Dome Radius <b>r</b>           |        | 6.00        | 8.00        | 10.00       | 12.00       | 15.00       | 20.00       | 25.00       | 28.00       |

| Parameter ↓                    | Size → | M16x2.0     | M18x2.5     | M20x2.5     | M22x2.5     | M24x3.0     | M27x3.0     | M30x3.5     |
|--------------------------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <b>Item Code</b> →             |        | R4D15C16000 | R4D15C18000 | R4D15C20000 | R4D15C22000 | R4D15C24000 | R4D15C27000 | R4D15C30000 |
| Width A/F <b>s</b>             |        | 24.00       | 27.00       | 30.00       | 32.00       | 36.00       | 41.00       | 46.00       |
| Width A/C <b>e min</b>         |        | 26.75       | 29.56       | 32.95       | 35.03       | 39.55       | 45.20       | 50.85       |
| Hole Depth <b>t</b>            | Max    | 17.35       | 19.42       | 21.42       | 22.42       | 24.42       | 26.42       | 28.42       |
|                                | Min    | 16.65       | 18.58       | 20.58       | 21.58       | 23.58       | 25.58       | 27.58       |
| Nut Height <b>h</b>            | Max    | 20.00       | 22.00       | 25.00       | 28.00       | 30.00       | 32.00       | 34.00       |
|                                | Min    | 19.48       | 21.48       | 24.48       | 27.48       | 29.48       | 31.38       | 33.38       |
| Wrenching Height <b>mw min</b> |        | 10.00       | 11.00       | 12.50       | 14.00       | 15.00       | 16.00       | 17.00       |
| Dome Thickness <b>w</b>        |        | 2.00        | 2.00        | 2.50        | 3.00        | 3.00        | 3.00        | 3.00        |
| Dome Radius <b>r</b>           |        | 30.00       | 32.00       | 35.00       | 35.00       | 40.00       | 50.00       | 60.00       |

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F