




CAN BOLT CAN SHELL

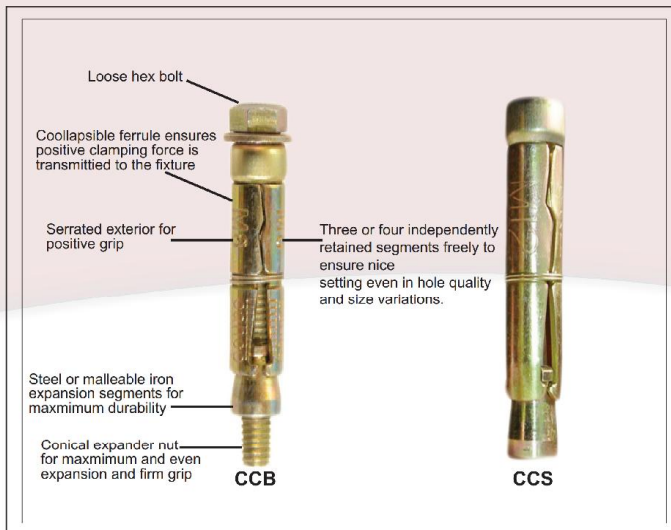

ADVANTAGES

- Installing heavy equipment and machinery.
- Fixing balustrade, barriers, roller shutter doors, fire doors and switchgear.
- Securing structural fixtures.
- Optimum taper nut angle for maximum expansion in all substrates.
- Shield available separately.

APPLICATIONS

- For use in concrete and most types masonry.
- Ideal for overhead and ceiling work or heavy items.
- Securing cable trays. Ducting and trunking.
- Installing partitions and structural fixtures.
- For use in Roller shutter doors.
- For use in Fire doors.
- For use in Steelwork.

PRODUCT SPECIFICATION

Bolt Size	Bolt Length	Fixture Thickness	Hole Diameter	Minimum Hole Depth	Packing
	[mm]	[mm]	[mm]	[mm]	pcs
M6	55	10	12	50	50
	70	25			
	85	40			
M8	65	10	14	55	50
	80	25			
	95	40			
M10	75	10	16	65	50
	90	25			
	115	50			
	140	75			
M12	90	15	20	85	25
	105	25			
	120	40			
	140	60			
M16	135	15	25	125	10
	150	30			
	180	60			
M20	195	60	32	140	10
	235	100			
M24	255	100	38	160	5
	300	150			2

* If the fixture thickness is less than the stated maximum, increase hole depth by the difference between actual and maximum thickness.

