




CAN PROJECTION ANCHOR

ADVANTAGES

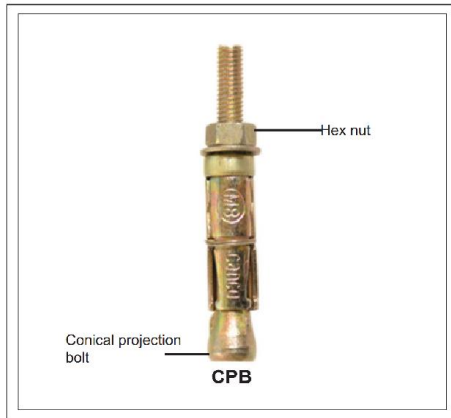

- Provides a projecting stud to support fixture during installation and removal.
- ferrule marked with hole diameter for correct installation.
- Pressed steel segments ensure consistent dimensional accuracy.
- Optimum taper nut angle for maximum expansion in all sub-strates.

APPLICATIONS

- Roller shutter doors.
- Fire doors.
- Wall plates.
- Security grills.
- Signs.
- Fencing.

PRODUCT SPECIFICATION

Bolt Size	Bolt Length	Fixture Thickness	Hole Diameter	Minimum Hole Depth	Packing
	[mm]	[mm]	[mm]	[mm]	pcs.
M6	65	10	12	50	50
	80	25			
	115	60			
M8	75	10	14	55	50
	90	25			
	125	60			
M10	90	15	16	65	50
	105	30			
	135	60			
M12	110	15	20	85	25
	125	30			
	170	75			
M16	150	15	25	125	10
	170	35			
	210	75			
M20	170	15	32	140	10
	185	30			
	255	100			
M24	255	75	38	160	5
	300	150			2

