



Since : 1993

J.C. GUPTA & SONS

Fastener Super Speciality

#7/A, Sree Venkateshwara Building, Sadar Patrappe Road, Bangalore - 560002

41478141, 22290559, 9880539870  www.jcfasteners.com  info@jcfasteners.com / jcsons@gmail.com

GSTIN : 29AABFJ2719C1ZO
IEC : 00710030274

ANCHOR FIXINGS GUIDE

Anchor bolts are used extensively in concrete, brick and block masonry and cavities to make structural attachments and connections. To date, a limited amount of information has been available to aid designers and users in the selection and design of anchor bolts in various types of substrates.

In new masonry construction, anchor bolts were commonly embedded in walls and columns to support beams, plates and ledgers. However, for flexibility and ease of construction, the use of post-installed anchors is increasing.

Post-installed anchor bolt systems

In prefabricated panel construction, anchor bolts are used to facilitate connections to the structural frame. Renovation and rehabilitation of existing masonry structures usually require that anchor bolts be used to attach stair risers, elevator tracks and various frame assemblages for equipment installation.



This is only a fraction of the possible uses of anchor bolts in masonry construction and with the increase of new, innovative architectural masonry designs, the uses of anchor bolts in masonry construction are likely to increase.

Anchors can be divided into two generic categories:

Expansion-type anchors and Adhesive or Chemical-type anchors.


Expansion Anchors.

(a) Torque-controlled expansion anchors

Sleeve anchors develop their strength by the expansion of a cylindrical metal sleeve or shield into the base material as the bolt is tightened. The expansion of the sleeve along the length of the anchor provides a larger bearing surface than the wedge anchor, and is recommended for use in brick masonry



Wedge anchors develop their hold by means of a wedge or wedges that are forced into the base material when the bolt is tightened. The wedges create large point bearing stresses within the hole



Drop in Anchors are produced to allow shallow embedment depths and are expanded or set by an impact setting tool.

These are extremely suitable for installations into roof slabs. As the combination of shallow embedment and high stresses imparted by the expansion tend to cause cracking or splitting in masonry, they are not recommended for use in brick.



(b) Concrete screw

Concrete screws are screwed into pre-drilled holes by a special screwdriver – TROX DRIVE

The threads will cut into the concrete and create mechanical interlock between screw and concrete. This is an expansion free fixing.



(c) Nylon based Anchors and Fixings

Wallplugs – Nylon wallplugs are placed in pre-drilled holes and screws are tightened into the plug creating the expansion.

These are available in many sizes and are very versatile useful for Brick, Block and concrete. Used for light loads.



Nylon Frame Fixings – A hole is drilled through the frame and into the masonry. The whole fixing is inserted through the frame into the masonry and the screw tightened.

These fixings are available in various head styles and plug designs to make them suitable for multiple applications in Brick, Block, Concrete, Aerated concrete, hollow bricks etc.





Suitable for fixing of facades, doors, windows, gates, cable trays, metal bracket etc.


(d) **CAVITY Fixings** where objects need to be fixed onto plasterboard and other wall and ceiling cavities.



Expandet Rosett® is the strongest fastening solution in plasterboards, gypsum fibre boards, chipboards, and other cavity walls.

No special Tools are required.

Designed for heavy loads.

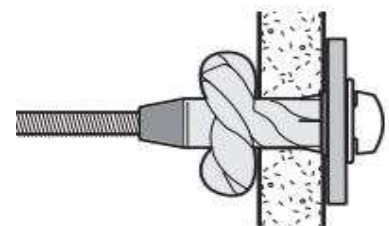

PLASTERPLUG Nylon Cavity Anchor

Used with screw is effective in most of the quick and light solutions in both 1 and 2 layer of plasterboard or other materials as chipboards, gypsum fiber boards and other walls with cavities.

This is a very popular design.



JET-Drive Metal anchor

This can be used without a predrill in most cases making it a fast and easy fixing.


Useful for light fixings without the mess of drilling.



Metal Cavity Anchor

Suitable for fixing cable trays, brackets, piping, and boards, etc .

Can be used with all metric threaded screws in plasterboards with cavity. Installation with special installing tool.

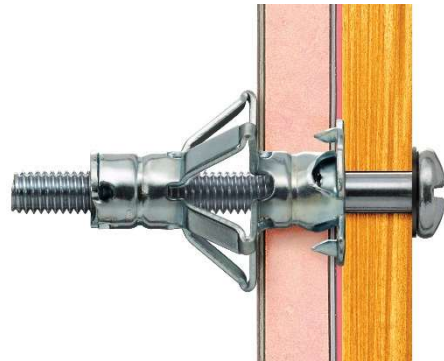

Spring Toggle Anchor

Extremely useful for fixing or hanging objects on a false ceiling.

Suitable for light duty fixings in ceilings and provides the possibility for bridging thick walls.

Especially suitable for fixing of suspended ceilings, brackets, cable trays, pipings etc.



Adhesive Anchors.



Instead of the anchor holding itself against the surface, a **chemical resin cures around** the anchor and keeps it held in place.

When to use Chemical Resin Anchors

If you need to fix something close to the edge of a brick or stone because you intend to hang a gate or add a small fixing, anchors that expand can cause strength-ruining splits and cracks in the masonry. If the structure is subject to dynamic loads, vibration or wind, then chemical anchoring is preferable over mechanical anchoring.

Using **anchors and fixings** is all about getting the most secure fitting possible and sometimes the only way to ensure the surface stays intact is to using chemical resin.

Because it doesn't expand or risk splitting/cracking, **chemical resin anchors** can also be used in weaker masonry that might crumble under the expansion of sleeve anchors and screw threads.


There are lots of benefits of using chemical resin anchors as they are more than capable of holding massive loads and their application can be fairly quick. However, correct preparation for fitting chemical resin anchors is essential.

How to use Chemical Resin Anchors

To use **chemical resin and anchors** together, ensure that you make an appropriate hole as recommended by the manufacturer's catalogue in terms of diameter, depth and spacing.



If your drilled holes are likely to have voids (frequent in hollow blocks or bricks), you'll need **resin injection anchor sleeves** to control the flow of resin and provide a secure fix to the substrate.

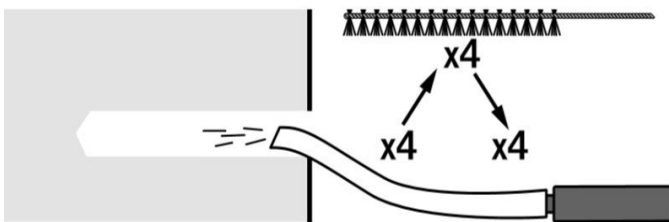


- Remove any loose material from the hole to get the best hold against a debris-free surface. Use a **resin hole brush** to do this. Also use a tube to blow air into the hole to get rid of more debris.

- Using an **applicator gun**, inject the resin into the hole.




It is important to make sure it's mixing properly before you inject it into the holes.

It's advised to let some out first to allow it to mix.

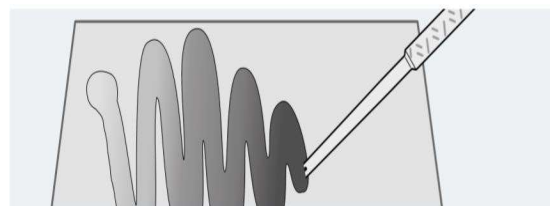


Always ensure that the nozzle width and length are correct, and make sure to slowly withdraw the nozzle, so trapped air pockets don't happen.

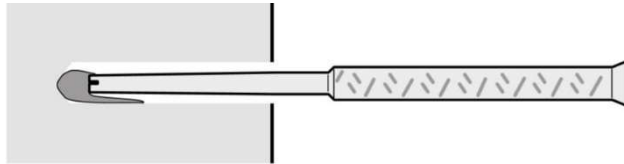

For deeper holes use a **resin nozzle extension tube** on the end of a **mixer nozzle**.

- In general filling about 70% of the hole will suffice to get complete coverage.
- As you push the stud in the hole, twist it a few times to break any air bubbles up. It also

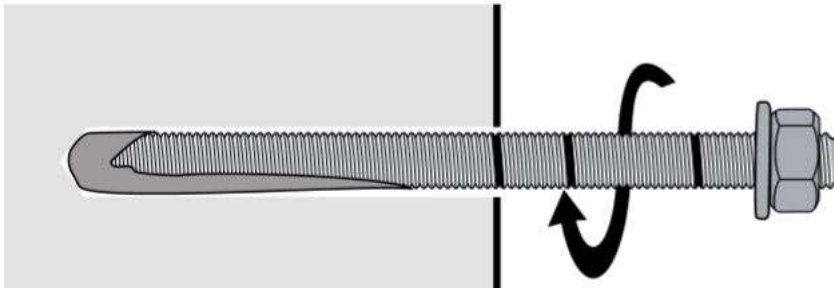

pushes the resin into any voids in the hole.

If the stud keeps pushing itself back out it may need a few more twists. All the threads should have an even covering.

- Once all the studs are in, you'll have to leave them alone. How long this takes will depend on the brand of resin as well as the temperature. Resin tubes will have a guide on the label: a gel time and full cure time. Don't load the studs until the full cure time.

The adhesive bond strength is reduced at elevated temperatures and may also be adversely affected by some chemicals.

ANCHOR BOLT DESIGN

Anchor bolts are used as a means of tying structural elements together in construction and therefore, provide continuity in the overall structure. In virtually all applications, anchor bolts are



required to resist a combination of tension and shear loads acting simultaneously due to combinations of imposed dead loads, live loads, wind loads, seismic loads, thermal loads and impact loads. For this reason, and also to insure safety, anchor bolt details should receive the same design considerations as would any other structural connection.

This very useful free anchor design application can be downloaded from

the below link.

<https://expandet.dk/downloads/ACP.zip>


Considerations for Brick Masonry.

There are several considerations that should be examined when contemplating the use of expansion-type anchors in brick masonry. These are:

- 1) Expansion anchors should not be used to resist vibratory loads. Vibratory loads tend to loosen expansion anchors.
- 2) Specific torques are required to set expansion anchors. Excessive torque can reduce anchor strength or may lead to failure as excessive torque is applied.
- 3) Expansion anchors require solid, hard embedment material to develop their maximum capacities. Some brick construction may not provide a good embedment material due to voids formed by brick cores and partially filled mortar joints.

Considerations for Torque controlled anchors

Expansion anchors must be torqued per the values provided in the Manufacturer's Printed Installation Instructions (MPII) to properly expand the wedges and clamp the fixture. Under-torquing results in under-expansion of the wedges, which reduces the amount of clamping developed. Once pre-load/clamping is removed from an under-torqued expansion anchor subjected to tensile loading, the anchor will displace, resulting in follow-up wedge expansion and lift-off of the fixture.

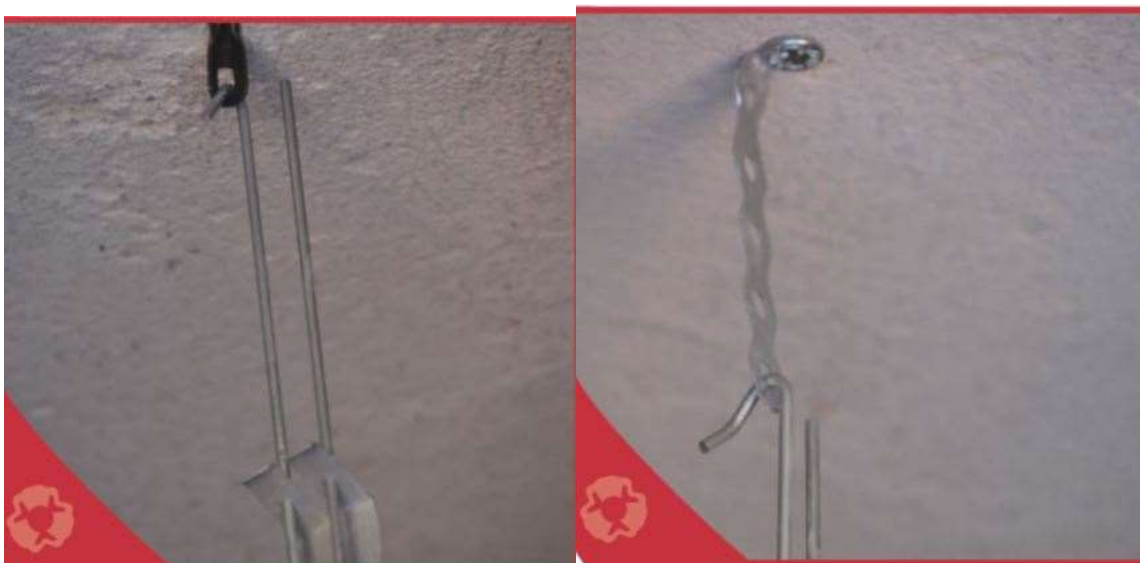

Anchor Selection Guide

	Concrete	Solid Brick	Sand-Lime Brick / Block	Hollow Brick	Lightweight aggregate concrete	Aerated concrete	Plasterboard	Fiber plasterboard	Chipboard	Wood
A2 Window Frame Screw		●								
Alum-Hammer Rivet	●	●	●							
Concrete Screw	●	●	●	●	●	●				
Concrete Hammer Rivet	●	●	●							
C-Bolt	●	●	●							
Driva							●			
Expansion Bolt	●	●	●							
Expansion Shield	●	●	●							
Spring Toggle Anchor							●	●	●	
Express Nail	●	●	●							
Throughbolt	●									
Plasterboard-Clips							●	●		
Heco Topix wood construction screw										●
Injection Mortar	●	●	●		●	●				
Injection Mortar with Sleeve				●						
Isoplug	●	●	●		●	●				
Isoplug with expansion	●	●	●		●	●				
Jet-Drive							●	●		
Adjustable Fram Screw with Super	●	●	●	●	●	●				●
Chemical Anchor	●	●	●		●	●				
LB					●	●				
LB Metal					●	●				
Light Rosett							●	●		
Celling Anchor	●						●	●		
Brass Anchor	●	●	●							●
Metal Cavity Anchor							●	●	●	
Metal Toggle Anchor							●	●	●	
MFA Frame Fixing	●	●	●	●	●	●				
Super Frame Fixing 8 mm	●	●	●	●	●	●				
Multi-Monti	●	●	●							
Wallplug	●	●	●							
Nylon Cavity Anchor							●	●	●	
Rosett							●	●		
Drop In Anchor	●									
Drop In Anchor with collar	●									
Special					●	●				
Super Nylon Plug	●	●	●	●	●	●				
Super with long expansion				●	●	●				
Super Frame Fixing	●	●	●	●	●	●				
Super Frame Fixing w/ long Exp.				●	●	●				
Heavy Duty Anchor	●									
Nail Anchor	●	●	●	●	●	●				
Toproc w/ Super/Super long Exp.	●	●	●	●	●	●				●

