



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

LOW HEAD ALLEN CAP SCREW DIN 7984

CATALOGUE NUMBER: **R4C39L**

AISS 304 A2

Note: Head may be plain or knurled

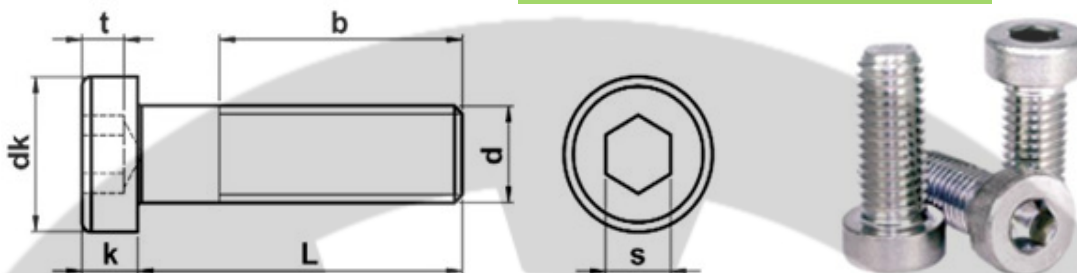

| Param↓ | Size→ | M3x0.5 | M4x0.7 | M5x0.8 | M6x1.0 | M8X1.25 | M10X1.5 |
|---------------|-------|--------|--------|--------|--------|---------|---------|
| Head Dia (dk) | Max | 5.50 | 7.00 | 8.50 | 10.00 | 13.00 | 16.00 |
| | Min | 5.32 | 6.78 | 8.28 | 9.78 | 12.73 | 15.73 |
| Socket A/F s | | 2.00 | 2.50 | 3.00 | 4.00 | 5.00 | 7.00 |
| Hd Thk (k) | Max | 2.00 | 2.80 | 3.50 | 4.00 | 5.00 | 6.00 |
| | Min | 1.86 | 2.66 | 3.32 | 3.82 | 4.82 | 5.82 |
| t | | 1.50 | 2.30 | 2.70 | 3.00 | 3.80 | 4.50 |
| b | | 12 | 14 | 16 | 18 | 22 | 26 |

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

| Length↓ | Size→ | M3x0.5 | M4x0.7 | M5x0.8 | M6x1.0 | M8X1.25 | M10X1.5 |
|---------|-------|-------------|-------------|-------------|-------------|-------------|-------------|
| 4 | | R4C39L03004 | | | | | |
| 5 | | R4C39L03005 | | | | | |
| 6 | | R4C39L03006 | R4C39L04006 | R4C39L05006 | R4C39L06006 | | |
| 8 | | R4C39L03008 | R4C39L04008 | R4C39L05008 | R4C39L06008 | R4C39L08008 | |
| 10 | | R4C39L03010 | R4C39L04010 | R4C39L05010 | R4C39L06010 | R4C39L08010 | R4C39L10010 |
| 12 | | R4C39L03012 | R4C39L04012 | R4C39L05012 | R4C39L06012 | R4C39L08012 | R4C39L10012 |
| 14 | | R4C39L03014 | R4C39L04014 | R4C39L05014 | R4C39L06014 | R4C39L08014 | R4C39L10014 |
| 16 | | R4C39L03016 | R4C39L04016 | R4C39L05016 | R4C39L06016 | R4C39L08016 | R4C39L10016 |
| 18 | | R4C39L03018 | R4C39L04018 | R4C39L05018 | R4C39L06018 | R4C39L08018 | R4C39L10018 |
| 20 | | R4C39L03020 | R4C39L04020 | R4C39L05020 | R4C39L06020 | R4C39L08020 | R4C39L10020 |
| 22 | | R4C39L03022 | R4C39L04022 | R4C39L05022 | R4C39L06022 | R4C39L08022 | R4C39L10022 |
| 25 | | R4C39L03025 | R4C39L04025 | R4C39L05025 | R4C39L06025 | R4C39L08025 | R4C39L10025 |
| 30 | | R4C39L03030 | R4C39L04030 | R4C39L05030 | R4C39L06030 | R4C39L08030 | R4C39L10030 |
| 35 | | R4C39L03035 | R4C39L04035 | R4C39L05035 | R4C39L06035 | R4C39L08035 | R4C39L10035 |
| 40 | | R4C39L03040 | R4C39L04040 | R4C39L05040 | R4C39L06040 | R4C39L08040 | R4C39L10040 |
| 45 | | R4C39L03045 | R4C39L04045 | R4C39L05045 | R4C39L06045 | R4C39L08045 | R4C39L10045 |
| 50 | | R4C39L03050 | R4C39L04050 | R4C39L05050 | R4C39L06050 | R4C39L08050 | R4C39L10050 |
| 55 | | | R4C39L04055 | R4C39L05055 | R4C39L06055 | R4C39L08055 | R4C39L10055 |
| 60 | | | R4C39L04060 | R4C39L05060 | R4C39L06060 | R4C39L08060 | R4C39L10060 |
| 65 | | | | R4C39L05065 | R4C39L06065 | R4C39L08065 | R4C39L10065 |
| 70 | | | | R4C39L05070 | R4C39L06070 | R4C39L08070 | R4C39L10070 |
| 75 | | | | R4C39L05075 | R4C39L06075 | R4C39L08075 | R4C39L10075 |
| 80 | | | | R4C39L05080 | R4C39L06080 | R4C39L08080 | R4C39L10080 |
| 90 | | | | | R4C39L06090 | R4C39L08090 | R4C39L10090 |
| 100 | | | | | R4C39L06100 | R4C39L08100 | R4C39L10100 |
| 110 | | | | | R4C39L06110 | R4C39L08110 | R4C39L10110 |
| 120 | | | | | R4C39L06120 | R4C39L08120 | R4C39L10120 |

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

LOW HEAD ALLEN CAP SCREW DIN 7984

CATALOGUE NUMBER: **R4C39L**

AISS 304 A2

Note: Head may be plain or knurled

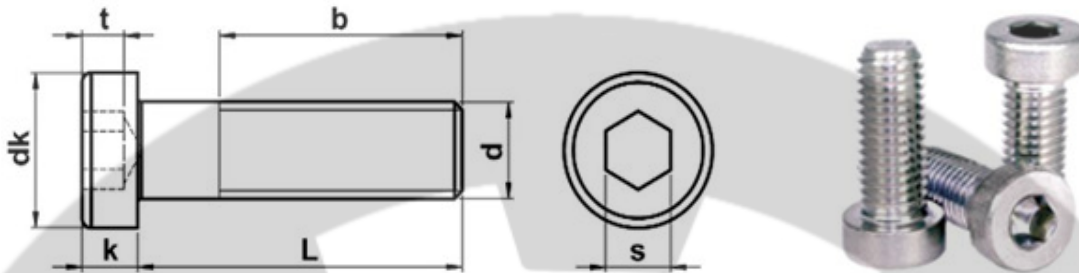

| Param↓ | Size→ | M12x1.75 | M14x2.0 | M16x2.0 | M18x2.0 | M20x2.5 | M24x3.0 |
|---------------|-------|----------|---------|---------|---------|---------|---------|
| Head Dia (dk) | Max | 18.00 | 21.00 | 24.00 | 27.00 | 30.00 | 36.00 |
| | Min | 17.73 | 20.67 | 23.67 | 26.67 | 29.67 | 35.61 |
| Socket A/F s | | 8.00 | 10.00 | 12.00 | 12.00 | 14.00 | 17.00 |
| Hd Thk (k) | Max | 7.00 | 8.00 | 9.00 | 9.00 | 11.00 | 13.00 |
| | Min | 6.78 | 7.78 | 8.78 | 9.78 | 10.73 | 11.73 |
| t | | 5.00 | 5.30 | 5.50 | 5.50 | 7.50 | 8.00 |
| b | | 30 | 34 | 38 | 38 | 46 | 54 |

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

| Length↓ | Size→ | M12x1.75 | M14x2.0 | M16x2.0 | M18x2.0 | M20x2.5 | M24x3.0 |
|---------|-------|-------------|-------------|-------------|-------------|-------------|-------------|
| 16 | | R4C39L12016 | R4C39L14016 | | | | |
| 18 | | R4C39L12018 | R4C39L14018 | | | | |
| 20 | | R4C39L12020 | R4C39L14020 | R4C39L16020 | R4C39L18020 | | |
| 25 | | R4C39L12025 | R4C39L14025 | R4C39L16025 | R4C39L18025 | R4C39L20025 | |
| 30 | | R4C39L12030 | R4C39L14030 | R4C39L16030 | R4C39L18030 | R4C39L20030 | R4C39L24030 |
| 35 | | R4C39L12035 | R4C39L14035 | R4C39L16035 | R4C39L18035 | R4C39L20035 | R4C39L24035 |
| 40 | | R4C39L12040 | R4C39L14040 | R4C39L16040 | R4C39L18040 | R4C39L20040 | R4C39L24040 |
| 45 | | R4C39L12045 | R4C39L14045 | R4C39L16045 | R4C39L18045 | R4C39L20045 | R4C39L24045 |
| 50 | | R4C39L12050 | R4C39L14050 | R4C39L16050 | R4C39L18050 | R4C39L20050 | R4C39L24050 |
| 55 | | R4C39L12055 | R4C39L14055 | R4C39L16055 | R4C39L18055 | R4C39L20055 | R4C39L24055 |
| 60 | | R4C39L12060 | R4C39L14060 | R4C39L16060 | R4C39L18060 | R4C39L20060 | R4C39L24060 |
| 65 | | R4C39L12065 | R4C39L14065 | R4C39L16065 | R4C39L18065 | R4C39L20065 | R4C39L24065 |
| 70 | | R4C39L12070 | R4C39L14070 | R4C39L16070 | R4C39L18070 | R4C39L20070 | R4C39L24070 |
| 75 | | R4C39L12075 | R4C39L14075 | R4C39L16075 | R4C39L18075 | R4C39L20075 | R4C39L24075 |
| 80 | | R4C39L12080 | R4C39L14080 | R4C39L16080 | R4C39L18080 | R4C39L20080 | R4C39L24080 |
| 90 | | R4C39L12090 | R4C39L14090 | R4C39L16090 | R4C39L18090 | R4C39L20090 | R4C39L24090 |
| 100 | | R4C39L12100 | R4C39L14100 | R4C39L16100 | R4C39L18100 | R4C39L20100 | R4C39L24100 |
| 110 | | R4C39L12110 | R4C39L14110 | R4C39L16110 | R4C39L18110 | R4C39L20110 | R4C39L24110 |
| 120 | | R4C39L12120 | R4C39L14120 | R4C39L16120 | R4C39L18120 | R4C39L20120 | R4C39L24120 |
| 130 | | R4C39L12130 | | R4C39L16130 | | R4C39L20130 | R4C39L24130 |
| 140 | | R4C39L12140 | | R4C39L16140 | | R4C39L20140 | R4C39L24140 |
| 150 | | R4C39L12150 | | R4C39L16150 | | R4C39L20150 | R4C39L24150 |

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F