




NYLOCK NUT Low Profile Type

DIN 985

CATALOGUE NUMBER: **F2D67T**

MS - ZINC

Prevailing Torque Type Nut with Non-Metallic Insert

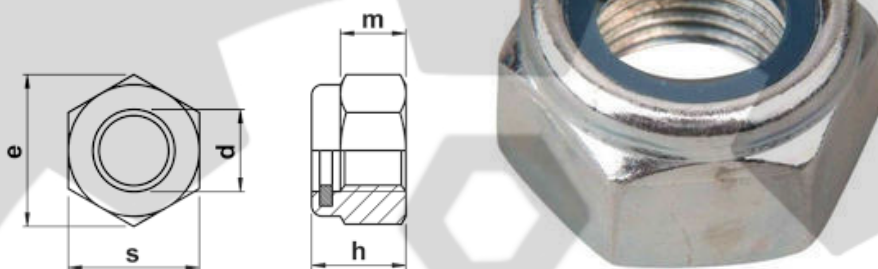

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Nominal Size d Thread Size ↓	PART NO.	Width Across Flat		Width Across Corners	Thickness	Height	
		s Min	s Max	e Min	m Min	h Min	h Max
M2.5x0.45	F2D67T20500	5	4.82	5.5	2.3	3.5	3.2
M3x0.5	F2D67T03000	5.5	5.32	6.01	2.4	4.0	3.7
M4x0.7	F2D67T04000	7	6.78	7.66	2.9	5.0	4.7
M5x0.8	F2D67T05000	8	7.78	8.79	3.2	5.0	4.7
M6x1.0	F2D67T06000	10	9.78	11.05	4.0	6.0	5.7
M8x1.25	F2D67T08000	13	12.73	14.38	5.5	8.0	7.6
M10x1.5	F2D67T10300	17	16.73	18.90	6.5	10.0	9.6
M12x1.75	F2D67T12200	19	18.67	21.10	8.0	12.0	11.6
M14x2.0	F2D67T14200	22	21.67	24.19	9.5	14.0	13.3
M16x2.0	F2D67T16200	24	23.67	26.75	10.5	16.0	15.3
M18x2.5	F2D67T18000	27	26.16	29.56	13.0	18.5	17.7
M20x2.5	F2D67T20000	30	29.16	32.95	14.0	20.0	18.7
M22x2.5	F2D67T22000	32	31.00	35.03	15.0	22.0	20.7
M24x3.0	F2D67T24000	36	35.00	39.55	15.0	24.0	22.7
M27x3.0	F2D67T27000	41	40.00	45.02	17.0	27.0	25.7
M30x3.5	F2D67T30000	46	45.00	50.85	19.0	30.0	28.7

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F