



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

THROUGH STANDOFF SOS

UNIFIED Series

CATALOGUE NUMBER: **F2S20u**

MS-ZN

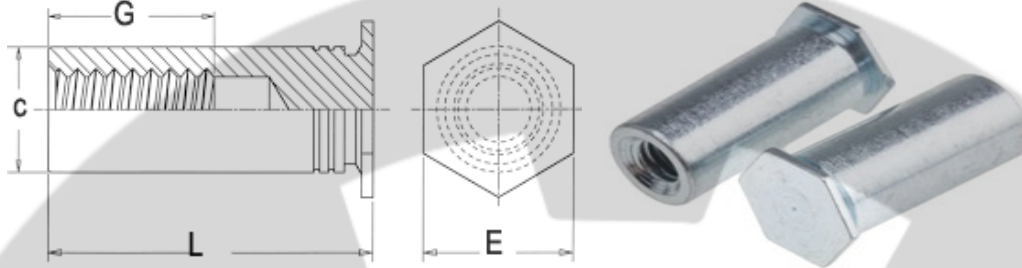

Parameter↓	Size→	#4-40	#4-40ALT	#6-32	#6-32ALT	#8-32	#10-32
Thread Code		440	6440	632	8632	832	032
C	+0.000 To 0.005	0.165	0.212	0.212	0.280	0.280	0.280
H nominal		0.187	0.250	0.250	0.312	0.312	0.312
Hole size in Sheet	+0.003	0.166	0.213	0.213	0.281	0.281	0.281
Min Sheet Thickness		0.04	0.04	0.04	0.05	0.05	0.05
Min Dist Hole Centre to Edge		0.23	0.27	0.27	0.31	0.31	0.31
Max tightening torque for mating screw lbs		4.20	4.20	8.00	8.00	17.00	30.00

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in Inches

D ±0.5	Length↓	Dia→	#4-40	#4-40ALT	#6-32	#6-32ALT	#8-32	#10-32
	1/4"							
	5/16"							
	3/8"							
0.187"	7/16"							
	1/2"							
0.312"	5/8"							
	3/4"							
	7/8"							
	1"							
0.437"	1-1/8"							
	1-1/4"							
	Length Tolerance	+0.002 -0.005						

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F