



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

SELF DRILLING HEX SCREW WITH FLANGE

DIN 7504K

CATALOGUE NUMBER: **R4D11B**

AINI 304 A2 Bi-Metallic

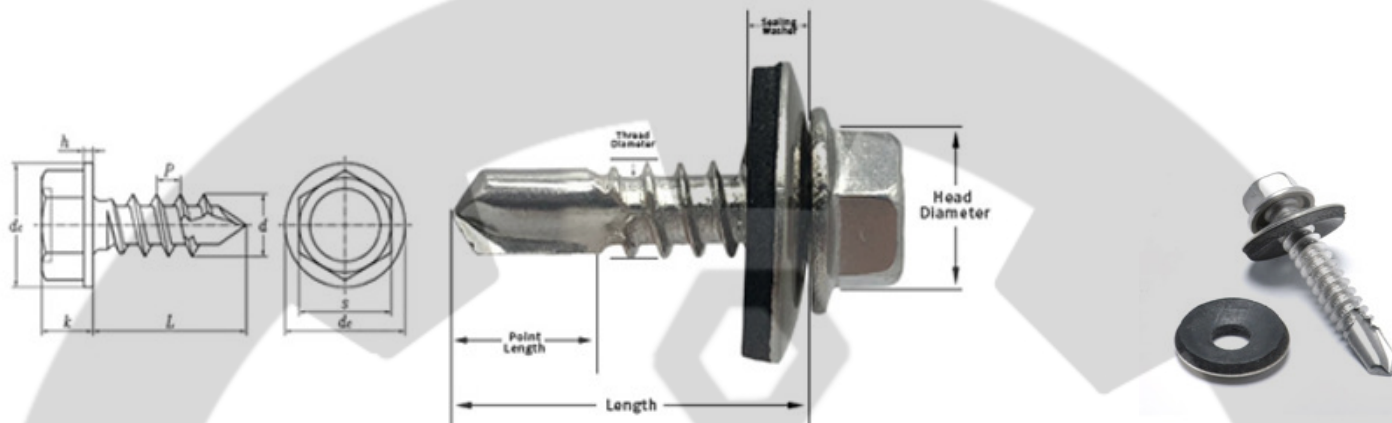

Parameter ↓	Dia (d)→	4.8	5.5	6.3
	ISO Size	#10	#12	#14
Head Height k		4.95	5.45	6.25
Washer Dia de		16	16	16
Profile Sheet Thickness		0.5-2.5mm	0.5-5.0mm	0.5-6.0mm
Recommended Speed		1200-1800 U/min	1200-1800 U/min	1200-1800 U/min
Max Drill (profile thickness)		≤ 2.5	≤ 6.5	≤ 6.5

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Length ↓	Dia (d)→	4.8	5.5	6.3
	ISO Size→	#10	#12	#14
20		R4D11B10020		
25		R4D11B10025	R4D11B12025	R4D11B14025
30			R4D11B12030	
35			R4D11B12035	
50			R4D11B12050	
60			R4D11B12060	
70			R4D11B12070	
90			R4D11B12090	
110			R4D11B12110	
130			R4D11B12130	
150			R4D11B12150	

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative.

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F