



# J.C. GUPTA & SONS

Fastener Super Speciality

GSTIN : 29AABFJ2719C1ZO  
IEC : 00710030274

#7/A, Sree Venkateshwara Building, Sadar Patrapa Road, Bengaluru - 560002

41478141, 9880539870 www.jcfasteners.com sales@jcfasteners.com

## BLIND RIVETS DOMED HEAD (~ DIN EN ISO 15983)

Rivet Body

**MONEL \* zinc plated**



Mandrel

**Stainless Steel A2 [AISI 304]**



## Catalogue Datasheet R4D31G

(useful for highly corrosive conditions)

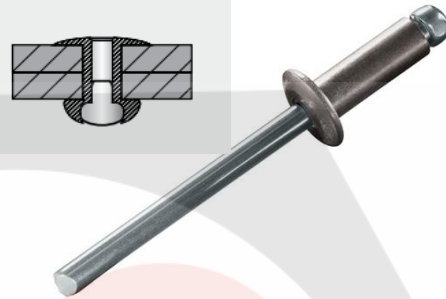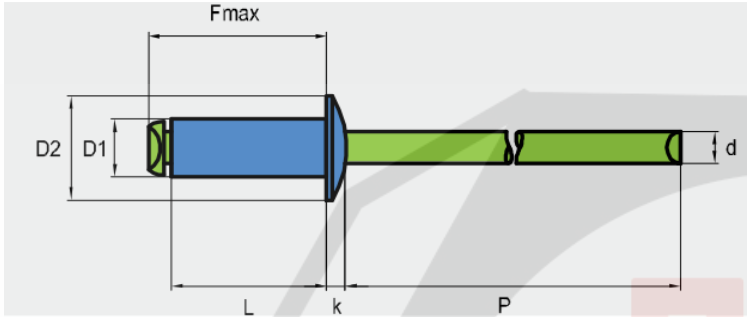

Dimensions in MM

Rivet Size	Hole Size	Shear	Tensile	D1	D2	k	d	P
$\emptyset$				Rivet Dia	Head Dia	Hd Thickness	Stem Dia	Stem Length
<b>3.2 series</b>	3.3 mm	1500 N	1900 N	3.2 +0.08/-0.15	6.3 +/- 0.3	1.0 +/- 0.2	1.90	≥ 27.0
<b>4.0 series</b>	4.1 mm	2200 N	3000 N	4.0 +0.08/-0.15	7.9 +/- 0.3	1.2 +/- 0.3	2.30	
<b>4.8 series</b>	4.9 mm	3300 N	3750 N	4.8 +0.08/-0.15	8.1 +/- 0.3	1.2 +/- 0.3	2.90	

Length Tolerance +1.0/-0.2

	F-Max		CODE		F-Max		CODE
<b>3.2 x 6.2 mm</b>	11.20	1.8-3.1 mm	R4D3132602G	<b>4.8 x 6.2 mm</b>	11.70	0.5-2.3 mm	<b>R4D3148602G</b>
<b>3.2 x 7.5 mm</b>	12.50	3.1-4.3 mm	R4D3132705G	<b>4.8 x 7.7 mm</b>	13.20	2.3-3.8 mm	R4D3148707G
<b>3.2 x 9.0 mm</b>	14.00	4.3-5.8 mm	R4D3132009G	<b>4.8 x 9.3 mm</b>	14.80	3.8-5.1 mm	R4D3148903G
<b>3.2 x 10.3 mm</b>	15.30	5.8-7.1 mm	R4D3132103G	<b>4.8 x 10.0 mm</b>	15.50	5.1-5.8 mm	R4D3148010G
<b>4.0 x 6.2 mm</b>	11.20	1.3-2.5 mm	<b>R4D3104602G</b>	<b>4.8 x 12.8 mm</b>	18.30	5.8-8.6 mm	R4D3148128G
<b>4.0 x 7.8 mm</b>	12.80	2.5-4.1 mm	R4D3104708G	<b>4.8 x 16.5 mm</b>	22.00	8.6-12.4 mm	<b>R4D3148165G</b>
<b>4.0 x 9.5 mm</b>	14.50	4.1-5.8 mm	<b>R4D3104905G</b>	<b>4.8 x 19.0 mm</b>	24.50	12.5 15.0 mm	<b>R4D3148019G</b>
<b>4.0 x 10.3 mm</b>	15.30	5.8-6.6 mm	<b>R4D3104103G</b>				
<b>4.0 x 11.5 mm</b>	16.50	6.6 - 7.9 mm	R4D3104115G				

Sizes in blue are limited availability. MOQ may be higher.

Data is strictly informative