



# Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com



www.royalfastenersindia.com

**FULL THREAD ALLEN CAP SCREW**  
**ANSI / ASME B18.3 UNF THREAD**

CATALOGUE NUMBER: **R4C39v**

**AISS 304 A2**



CS  
Note: Head may be plain or knurled

Parameter ↓	Size →	#2-64	#4-48	#6-40	#8-36	#10-32	1/4-28
<b>Head Dia (A)</b>	Max	0.140	0.183	0.226	0.270	0.312	0.375
	Min	0.134	0.176	0.218	0.262	0.303	0.365
<b>Major Dia (D)</b>	Max	0.086	0.112	0.138	0.164	0.190	0.250
	Min	0.082	0.1075	0.1329	0.1585	0.1840	0.2435
<b>Hd Height (H)</b>	Max	0.086	0.112	0.138	0.164	0.190	0.250
	Min	0.083	0.108	0.134	0.159	0.185	0.244
<b>J Socket</b>		0.078	0.094	0.109	0.141	0.156	0.188
<b>Key Size</b>		5/64	3/32	7/64	9/64	5/32	3/16

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Length ↓	Size →	#2-64	#4-48	#6-40	#8-36	#10-32	1/4-28
1/4"		R4C39v26462	R4C39v44862	R4C39v64062	R4C39v83662		
5/16"		R4C39v26479	R4C39v44879	R4C39v64079	R4C39v83679	R4C39v13279	
3/8"		R4C39v26491	R4C39v44891	R4C39v64091	R4C39v83691	R4C39v13291	R4C39v62091
1/2"		R4C39v26413	R4C39v44813	R4C39v64013	R4C39v83613	R4C39v13213	R4C39v62013
5/8"		R4C39v26415	R4C39v44815	R4C39v64015	R4C39v83615	R4C39v13215	R4C39v62015
3/4"		R4C39v26419	R4C39v44819	R4C39v64019	R4C39v83619	R4C39v13219	R4C39v62019
7/8"		R4C39v26423	R4C39v44823	R4C39v64023	R4C39v83623	R4C39v13223	R4C39v62023
1"		R4C39v26425	R4C39v44825	R4C39v64025	R4C39v83625	R4C39v13225	R4C39v62025
1-1/4"			R4C39v44831	R4C39v64031	R4C39v83631	R4C39v13231	R4C39v62031
1-1/2"			R4C39v44838	R4C39v64038	R4C39v83638	R4C39v13238	R4C39v62038
1-3/4"			R4C39v44844	R4C39v64044	R4C39v83644	R4C39v13244	R4C39v62044
2"			R4C39v44851	R4C39v64051	R4C39v83651	R4C39v13251	R4C39v62051
2-1/4"			R4C39v44856	R4C39v64056	R4C39v83656	R4C39v13256	R4C39v62056
2-1/2"							R4C39v62063
3"							R4C39v62076
3-1/2"							R4C39v62089
4"							R4C39v62102

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F



# Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

**FULL THREAD ALLEN CAP SCREW**  
**ANSI / ASME B18.3 UNF THREAD**

CATALOGUE NUMBER: **R4C39v**

**AISS 304 A2**

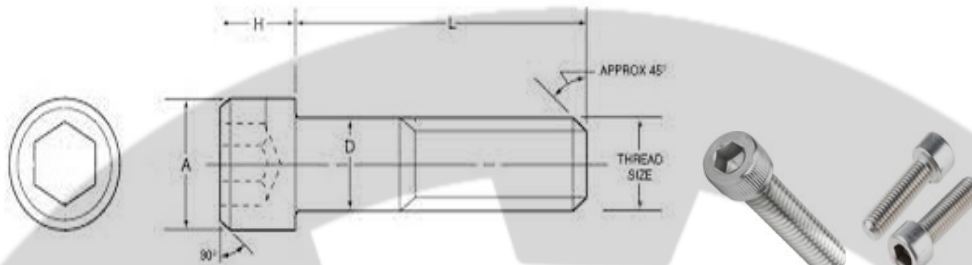

Note: Head may be plain or knurled

Parameter ↓	Size →	5/16-24	3/8-24	7/16-20	1/2-20	5/8-18	3/4-16
<b>Head Dia (A)</b>	Max	0.469	0.562	0.656	0.750	0.938	1.125
	Min	0.457	0.550	0.642	0.735	0.921	1.107
<b>Major Dia (D)</b>	Max	0.3125	0.375	0.4375	0.500	0.625	0.750
	Min	0.3053	0.3678	0.4294	0.4919	0.6163	0.7406
<b>Hd Height (H)</b>	Max	0.312	0.375	0.437	0.500	0.625	0.750
	Min	0.306	0.368	0.430	0.492	0.616	0.740
<b>J Socket</b>		0.250	0.312	0.375	0.375	0.500	0.625
<b>Key Size</b>		1/4	5/16	3/8	3/8	1/2	5/8

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Length ↓	Size →	5/16-24	3/8-24	7/16-20	1/2-20	5/8-18	3/4-16
<b>3/8"</b>	R4C39v79019						
<b>1/2"</b>	R4C39v79013	R4C39v91013	R4C39v11013				
<b>5/8"</b>	R4C39v79015	R4C39v91015	R4C39v11015	R4C39v13015			
<b>3/4"</b>	R4C39v79019	R4C39v91019	R4C39v11019	R4C39v13019			
<b>7/8"</b>	R4C39v79023	R4C39v91023	R4C39v11023	R4C39v13023			
<b>1"</b>	R4C39v79025	R4C39v91025	R4C39v11025	R4C39v13025	R4C39v15025	R4C39v19025	
<b>1-1/4"</b>	R4C39v79031	R4C39v91031	R4C39v11031	R4C39v13031	R4C39v15031	R4C39v19031	
<b>1-1/2"</b>	R4C39v79038	R4C39v91038	R4C39v11038	R4C39v13038	R4C39v15038	R4C39v19038	
<b>1-3/4"</b>	R4C39v79044	R4C39v91044	R4C39v11044	R4C39v13044	R4C39v15044	R4C39v19044	
<b>2"</b>	R4C39v79051	R4C39v91051	R4C39v11051	R4C39v13051	R4C39v15051	R4C39v19051	
<b>2-1/4"</b>	R4C39v79056	R4C39v91056	R4C39v11056	R4C39v13056	R4C39v15056	R4C39v19056	
<b>2-1/2"</b>	R4C39v79063	R4C39v91063	R4C39v11063	R4C39v13063	R4C39v15063	R4C39v19063	
<b>3"</b>	R4C39v79076	R4C39v91076	R4C39v11076	R4C39v13076	R4C39v15076	R4C39v19076	
<b>3-1/2"</b>	R4C39v79089	R4C39v91089	R4C39v11089	R4C39v13089	R4C39v15089	R4C39v19089	
<b>4"</b>	R4C39v79102	R4C39v91102	R4C39v11102	R4C39v13102	R4C39v15102	R4C39v19102	
<b>5"</b>	R4C39v79126	R4C39v91126	R4C39v11126	R4C39v13126	R4C39v15126	R4C39v19126	

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F