



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

FULL THREAD ALLEN CAP SCREW
ANSI / ASME B18.3 UNC THREAD

CATALOGUE NUMBER: **R6C39u**

ANSI 306 A4



Note: Head may be plain or knurled

Parameter ↓	Size →	#2-56	#4-40	#6-32	#8-32	#10-24	1/4-20
Head Dia (A)	Max	0.140	0.183	0.226	0.270	0.312	0.375
	Min	0.134	0.176	0.218	0.262	0.303	0.365
Major Dia (D)	Max	0.086	0.112	0.138	0.164	0.190	0.250
	Min	0.082	0.1075	0.1329	0.1585	0.1840	0.2435
Hd Height (H)	Max	0.086	0.112	0.138	0.164	0.190	0.250
	Min	0.083	0.108	0.134	0.159	0.185	0.244
J Socket		0.078	0.094	0.109	0.141	0.156	0.188
Key Size		5/64	3/32	7/64	9/64	5/32	3/16

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Length ↓	Size →	#2-56	#4-40	#6-32	#8-32	#10-24	1/4-20
1/4"		R6C39u25662	R6C39u44062	R6C39u63262	R6C39u83262		
5/16"		R6C39u25679	R6C39u44079	R6C39u63279	R6C39u83279	R6C39u12479	
3/8"		R6C39u25691	R6C39u44091	R6C39u63291	R6C39u83291	R6C39u12491	R6C39u62091
1/2"		R6C39u25613	R6C39u44013	R6C39u63213	R6C39u83213	R6C39u12413	R6C39u62013
5/8"		R6C39u25615	R6C39u44015	R6C39u63215	R6C39u83215	R6C39u12415	R6C39u62015
3/4"		R6C39u25619	R6C39u44019	R6C39u63219	R6C39u83219	R6C39u12419	R6C39u62019
7/8"		R6C39u25623	R6C39u44023	R6C39u63223	R6C39u83223	R6C39u12423	R6C39u62023
1"		R6C39u25625	R6C39u44025	R6C39u63225	R6C39u83225	R6C39u12425	R6C39u62025
1-1/4"			R6C39u44031	R6C39u63231	R6C39u83231	R6C39u12431	R6C39u62031
1-1/2"			R6C39u44038	R6C39u63238	R6C39u83238	R6C39u12438	R6C39u62038
1-3/4"			R6C39u44044	R6C39u63244	R6C39u83244	R6C39u12444	R6C39u62044
2"			R6C39u44051	R6C39u63251	R6C39u83251	R6C39u12451	R6C39u62051
2-1/2"							R6C39u62063
3"							R6C39u62076
3-1/2"							R6C39u62089
4"							R6C39u62102

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F



Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

FULL THREAD ALLEN CAP SCREW
ANSI / ASME B18.3 UNC THREAD

CATALOGUE NUMBER: **R6C39u**

ANSI 306 A4

Note: Head may be plain or knurled

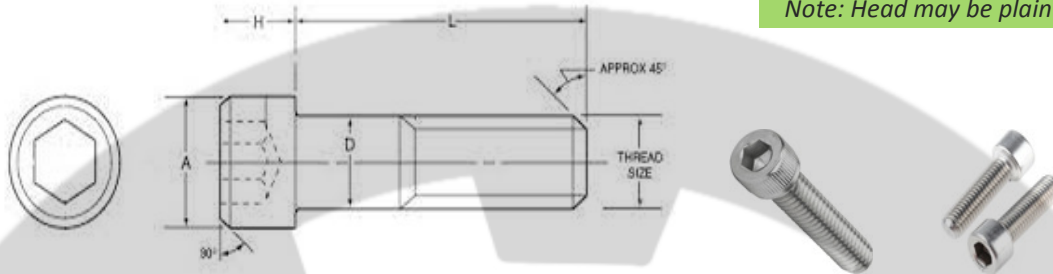

Parameter ↓	Size →	5/16-18	3/8-16	7/16-14	1/2-13	5/8-11	3/4-10
Head Dia (A)	Max	0.469	0.562	0.656	0.750	0.938	1.125
	Min	0.457	0.550	0.642	0.735	0.921	1.107
Major Dia (D)	Max	0.3125	0.375	0.4375	0.500	0.625	0.750
	Min	0.3053	0.3678	0.4294	0.4919	0.6163	0.7406
Hd Height (H)	Max	0.312	0.375	0.437	0.500	0.625	0.750
	Min	0.306	0.368	0.430	0.492	0.616	0.740
J Socket		0.250	0.312	0.375	0.375	0.500	0.625
Key Size		1/4	5/16	3/8	3/8	1/2	5/8

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in MM

Length ↓	Size →	5/16-18	3/8-16	7/16-14	1/2-13	5/8-11	3/4-10
3/8"	R6C39u79019						
1/2"	R6C39u79013	R6C39u91013	R6C39u11013				
5/8"	R6C39u79015	R6C39u91015	R6C39u11015	R6C39u13015			
3/4"	R6C39u79019	R6C39u91019	R6C39u11019	R6C39u13019			
7/8"	R6C39u79023	R6C39u91023	R6C39u11023	R6C39u13023			
1"	R6C39u79025	R6C39u91025	R6C39u11025	R6C39u13025	R6C39u15025	R6C39u19025	
1-1/4"	R6C39u79031	R6C39u91031	R6C39u11031	R6C39u13031	R6C39u15031	R6C39u19031	
1-1/2"	R6C39u79038	R6C39u91038	R6C39u11038	R6C39u13038	R6C39u15038	R6C39u19038	
1-3/4"	R6C39u79044	R6C39u91044	R6C39u11044	R6C39u13044	R6C39u15044	R6C39u19044	
2"	R6C39u79051	R6C39u91051	R6C39u11051	R6C39u13051	R6C39u15051	R6C39u19051	
2-1/4"	R6C39u79056	R6C39u91056	R6C39u11056	R6C39u13056	R6C39u15056	R6C39u19056	
2-1/2"	R6C39u79063	R6C39u91063	R6C39u11063	R6C39u13063	R6C39u15063	R6C39u19063	
3"	R6C39u79076	R6C39u91076	R6C39u11076	R6C39u13076	R6C39u15076	R6C39u19076	
3-1/2"	R6C39u79089	R6C39u91089	R6C39u11089	R6C39u13089	R6C39u15089	R6C39u19089	
4"	R6C39u79102	R6C39u91102	R6C39u11102	R6C39u13102	R6C39u15102	R6C39u19102	
5"	R6C39u79126	R6C39u91126	R6C39u11126	R6C39u13126	R6C39u15126	R6C39u19126	

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F