



# Royal Industrial Suppliers

Quality Fasteners Specialist

No. 4, M.G.S. Complex, Benki Nawab Street, S.P. Road Cross, Bangalore 560002

An ISO 9001:2015 Certified Co



8310165941 / 9008782885



sales@royalfastenersindia.com




www.royalfastenersindia.com

## THROUGH STANDOFF SOS

UNIFIED Series

CATALOGUE NUMBER: **F2S19u**

**MS-ZN**

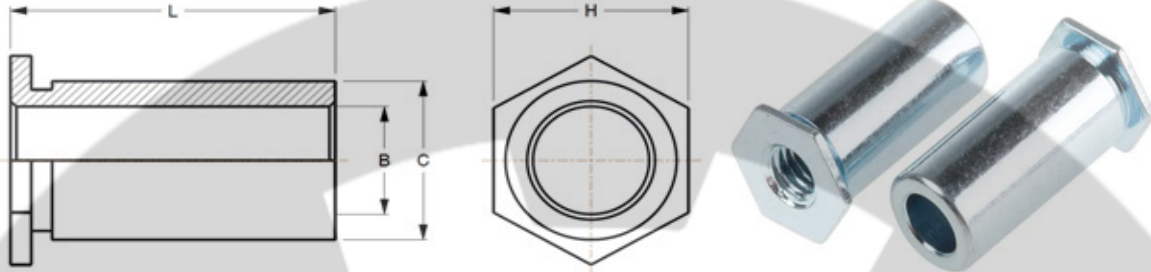

Parameter↓	Size→	#4-40	#4-40ALT	#6-32	#6-32ALT	#8-32	#10-32
<b>Thread Code</b>		440	6440	632	8632	832	032
<b>Counter Bore Dia B</b>	<b>±0.005</b>	0.125	0.125	0.156	0.156	0.188	0.203
<b>C</b>	<b>+0.000 To 0.005</b>	0.165	0.212	0.212	0.280	0.280	0.280
<b>H nominal</b>		0.187	0.250	0.250	0.312	0.312	0.312
<b>Hole size in Sheet</b>	<b>+0.003</b>	0.166	0.213	0.213	0.281	0.281	0.281
<b>Min Sheet Thickness</b>		0.04	0.04	0.04	0.05	0.05	0.05
<b>Min Dist Hole Centre to Edge</b>		0.23	0.27	0.27	0.31	0.31	0.31
<b>Max tightening torque for mating screw lbs</b>		4.20	4.20	8.00	8.00	17.00	30.00

Send your Orders / Enquiries along with the following Item Codes

All Dimensions are in Inches

D ±0.5	Length↓	Dia→	#4-40	#4-40ALT	#6-32	#6-32ALT	#8-32	#10-32
	1/4"							
	5/16"							
	3/8"							
0.187"	7/16"							
	1/2"							
0.312"	5/8"							
	3/4"							
	7/8"							
0.437"	1"							
	1-1/8"							
	1-1/4"							
Length Tolerance		+0.002 -0.005						

Sizes in BLUE are non-preferred. Availability is limited and MOQ is higher.

Data is strictly informative

Note: All Austenitic Stainless Steel Fasteners may exhibit some Magnetic Properties due to the Manufacturing Process.

Refer: ISO 3506-2 Annex F